


601A100

DASH NO.	OUTPUT ±5% VDC/1000 RPM	SPEED RANGE RPM	CURRENT AMPS(MAX)
1	100	100-2500	.20
2	50	100-5000	.40
3	50	100-5000	.40
4	200	100-1250	.10
5	20	100-5000	1
6	60	100-5000	.33
7	12	100-5000	1.67
8	126	100-2500	.15
9	184	100-1250	.10

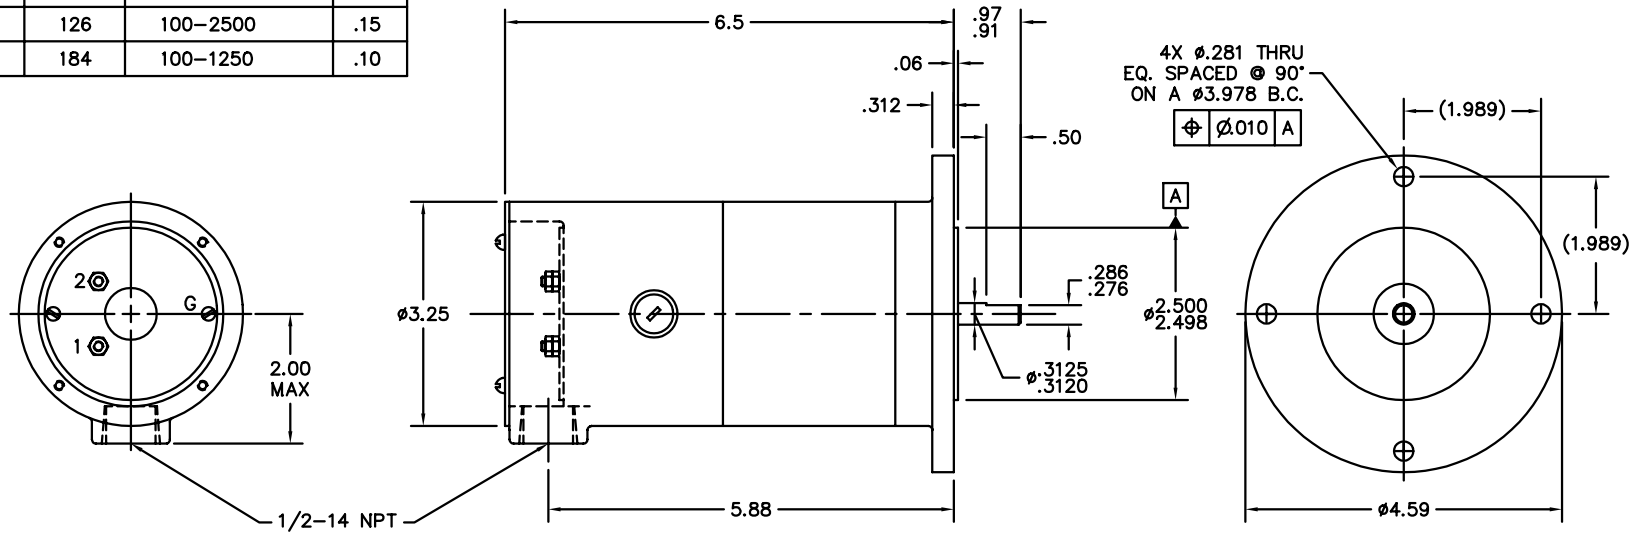

NOTES:

1. THE COMPLETE P/N CONSISTS OF 601A100 WITH A TACH NO. (EX. 601A100-2).
2. TERMINAL #2 IS PLUS AND #1 IS MINUS WHEN THE SHAFT IS ROTATED CCW (WHEN LOOKING INTO THE SHAFT PROJECTING FROM THE MOUNTING FLANGE).
3. FOR MAX. ACCURACY (LINEARITY), GENERATORS MUST BE RUN AT VERY LOW LOADS.
4. REVERSING ERROR FOR ALL UNITS LESS THAN 2%.
5. BUSHING MUST BE U.L. RECOGNIZED.

CUST. NAME	CUST. P.O.	CERTIFIED BY	MODEL	INSUL	AMB			
H.P.	MTG	TYPE	R.P.M.	VOLTS	ENCL	PHASE	FREQ	FRAME
REV. DESC: REDRAWN ON CAD						BALDOR ELECTRIC Co.		
REV. LTR: H	BY: BKW	REVISED: 09/21/00 11:37	TDR: 0219471	XPY TACHOMETER				
FILE: CHB00007969	MDL: -							
MTL: -								

601A100